


DFB-11XX-XX-30-VO

Fiber Coupled Distributed-Feedback Laser Diode with Integrated Isolator

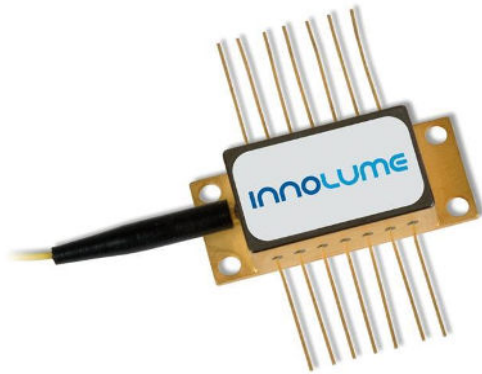

Features:

- Integrated free-space optical isolator (double stage)
- Output power > 30mW ex-fiber in 1120-1200nm range
- Mode-hop free continuous tuning
- Individual burn-in and thermal cycling screening
- Proprietary mirror coating technology enabling high reliability
- Built-in monitor photodiode (optional)
- 900um loose tube on fiber (optional)

Recommended Operating Conditions

@ CW, the case is mounted on room temperature heatsink

| Parameter | Min. | Typ. | Max. | Unit |
|------------------|------|------|------|------|
| Chip Temperature | 20 | 25* | 40 | °C |
| Forward Current | | 300 | 350 | mA |
| Output Power** | 5 | | 30 | mW |

* in some cases may vary depending on the selected wavelength

** kink-free over the entire range

Characteristics

@ CW, 25°C*, 300mA


| Parameter | Min. | Typ. | Max. | Unit |
|--|------|------|------|-------|
| Output Power @ 350mA | 30 | | | mW |
| Forward Voltage | | 1.5 | 3.5 | V |
| Threshold Current | | 30 | 90 | mA |
| Peak Wavelength** (chosen by customer) | 1120 | | 1200 | nm |
| Peak Wavelength Tolerance | | | ±1 | nm |
| Wavelength Temperature Tunability | | 110 | | pm/°C |
| Wavelength Current Tunability | | 2 | | pm/mA |
| Side-Mode Suppression Ratio (SMSR) | 40 | 50 | | dB |
| Linewidth (self-heterodyning @ 80MHz) | | 1 | 5 | MHz |
| Polarisation Extinction Ratio (PER) | 15 | 18 | | dB |
| Polarisation | | TE | | |

* in some cases may vary in 20-40°C range depending on the selected wavelength


** reachable within wavelength tolerance at power > 30mW

Typical Performance (for reference only)


Light Current Voltage Characteristics

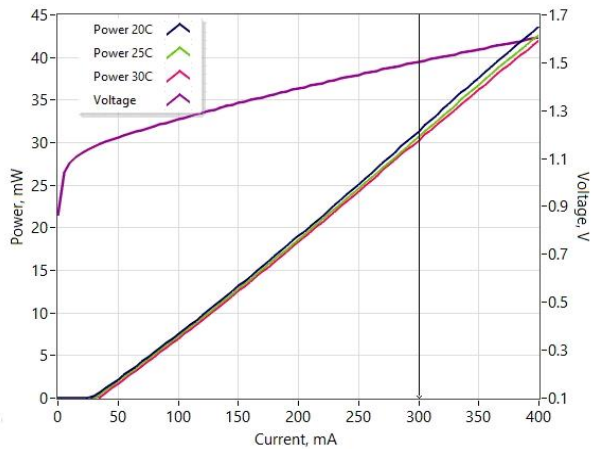


Optical Spectra vs Temperature (res. 10pm)

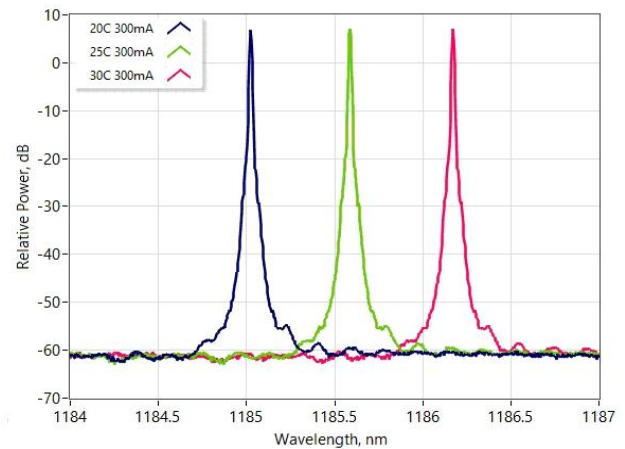

Peak Wavelength Tuning by Current

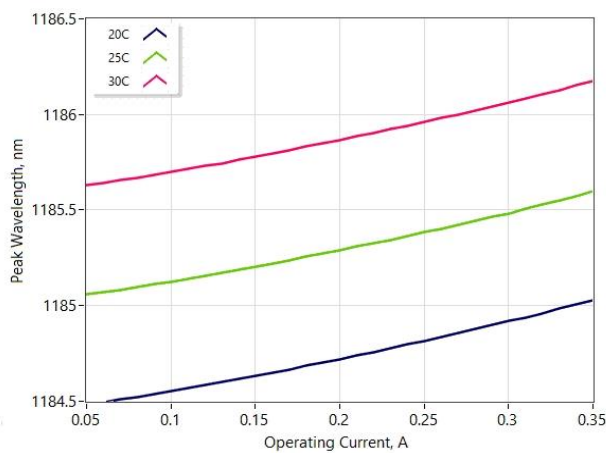



RF-line Spectrum

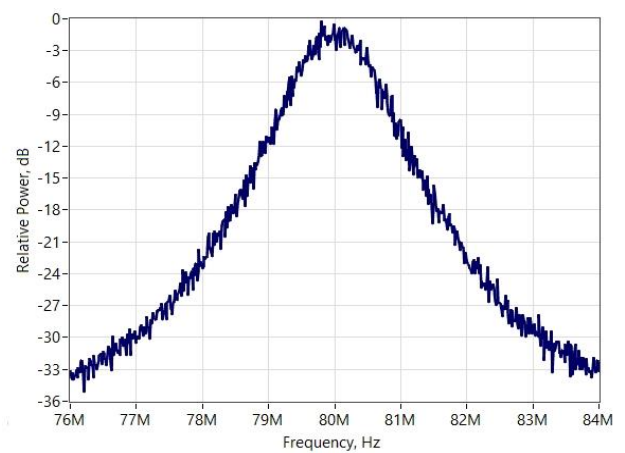

Absolute Maximum Ratings


| Parameter | Min | Max | Unit |
|----------------------------|-----|-----|------|
| Forward Current | | 400 | mA |
| Reverse Voltage | | 2 | V |
| TEC Current | | 3 | A |
| TEC Voltage | | 4 | V |
| Chip Operating Temperature | 5 | 50 | °C |
| Case Operating Temperature | 0 | 70 | °C |
| Storage Temperature | -40 | 85 | °C |
| Fiber Band Radius | 3 | | cm |
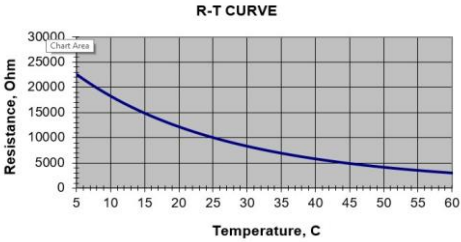
| Thermistor specification | | | Fiber specification | | | |
|---|---------|------|--------------------------------|-----------------|-----------------|------|
| Parameters | Value | Unit | Parameters | Value | Value | Unit |
| Type | NTC | | Fiber Type | HI1060 | PM980 | |
| Resistance @ 25°C | 10±0.1 | kOhm | Numerical Aperture (Typical) | 0.14 | 0.12 | |
| Beta 0-50°C | 3430±1% | K | Cut-off Wavelength | 920±50 | 900±70 | nm |
|  | | | Mode-Field Diameter | 6.2±0.3 @1060nm | 6.6±0.3 @1060nm | μm |
| | | | Cladding Diameter | 125±1 | 125±1 | μm |
| | | | Coating Diameter | 245±15 | 245±15 | μm |
| | | | Loose Tube Diameter (optional) | 900 | 900 | μm |
| | | | Connector | FC/APC | FC/APC | |
| | | | Key | narrow | narrow | |



The output light is polarized along the slow axis of PM fiber.

Dimensions (in mm)

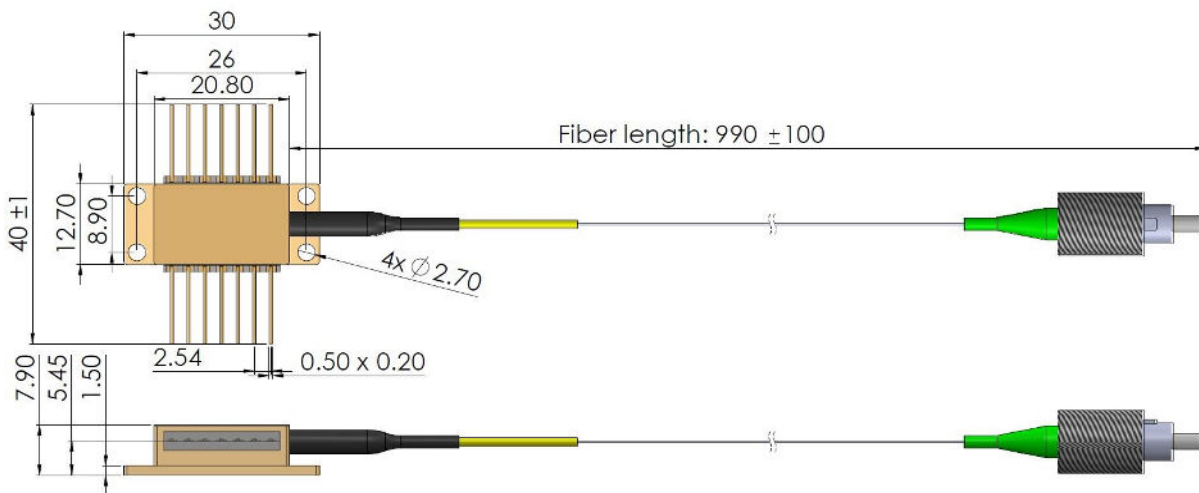

| # | Pin identification | # | Pin identification |
|---|--------------------|----|--------------------|
| 1 | TEC "+" | 8 | - |
| 2 | Thermistor | 9 | - |
| 3 | Photodiode "+" | 10 | Laser Diode "+" |
| 4 | Photodiode "-" | 11 | Laser Diode "-" |
| 5 | Thermistor | 12 | - |
| 6 | - | 13 | Case |
| 7 | - | 14 | TEC "-" |


Safety and Operating Instructions

The light emitted from this device is invisible and can be harmful to the human eye. Avoid looking directly into the fiber connector when the device is in operation. Proper laser safety eyewear must be worn during operation with open connector. Absolute Maximum Ratings may be applied to the device for short period of time only. Exposure to maximum ratings for extended period of time or exposure to more than one maximum rating may cause damage or affect the reliability of the device. Operating the device outside of its maximum ratings may cause device failure or a safety hazard. Power supplies used with the component must be employed such that the maximum forward current cannot be exceeded.

A proper heatsink for the device on thermal radiator is required. The device must be mounted on radiator with 4 screws (bolt down in X-style fashion with initial torque set to 0.075Nm and final X-style bolt down at 0.15Nm) or with clamps. The deviation from flatness of radiator surface must be less than 0.05mm. It's recommended using of Indium foil or thermal conductive and soft material between bottom of the case and heatsink for thermal interface. It's undesirable to use thermal grease for this. Avoid back reflection to the device. It may give impact on the device performance in aspects of spectrum and power stability. It also may cause fatal facet damage. Using of optical isolators is highly recommended to block back reflection.

Do not pull the fiber. Do not bend a fiber with a radius smaller than 3 cm. Fiber tip should always be protected from any contamination or damage during the process of installation. After removing the dust-preventing cap covered at fiber tip, carefully clean fiber tip by wiping through one direction using optical lens cleaning paper or cotton swab dabbed with Iso-Propanol or Ethyl alcohol. Operate the device with clean fiber connector only.

Electrostatic discharge is the primary cause of unexpected product failure. Take extreme precaution to prevent ESD. During device installation, ESD protection has to be maintained - use wrist straps, grounded work surfaces and rigorous antistatic techniques when handling the product.

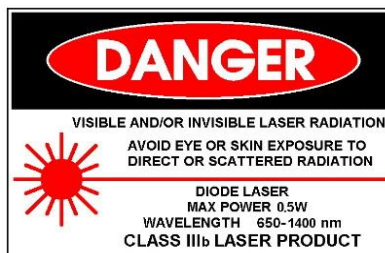

Part-number Identification

DFB-1120-HI-30-VO -> 30mW output power at 1120nm peak wavelength, HI-1060 fiber

DFB-1200-PM-30-VO-PD-LT -> 30mW output power at 1200nm peak wavelength, PM-980 fiber, with built-in monitor photodiode and fiber loose tube

NOTE: Innolume product specifications are subject to change without notice

| Revision history | | |
|------------------|-------------|-------------------------------|
| Rev | Date | Description |
| 01 | 25 Jan 2023 | Initial issue of the document |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |